IP Link® Device Interface Communication Sheet

This document provides additional assistance with wiring your Extron IP Link enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron IP Link enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type:	Switcher
Manufacturer:	Cypress
Firmware Version:	N/A
Model(s):	CSC-5300

Version History:

Driver Version	Date	IP Link Compiler	GC Version	Notes
1	2/20/2014	1.6.0	3.5.1	Initial version.

Driver Notes:

Control Commands & States:

Audio Delay	On	Off	
De-Interlacing	On	Off	
Input	HDMI1-3	PC	Component 1-2
	S-Video 1-2	Video 1-2	
Power Control	On	Off	
Reset	Execute		

Status Available:

Audio Delay	On	Off	
Connection Status	Connected	Disconnected	
De-Interlacing	On	Off	
Input	HDMI1-3	PC	Component 1-2
	S-Video 1-2	Video 1-2	
Power Control	On	Off	

MLC60 Series Supported Commands:

Audio Delay	On	Off	
De-Interlacing	On	Off	
Input	HDMI1-3	PC	Component 1-2
	S-Video 1-2	Video 1-2	
Power Control	On	Off	
Reset	Execute		

Cable and Adapter Requirements:

M/F DB9 RS-232 straight serial cable (Extron Electronics P/N 26-433-XX)

Notes for the Device:

Serial communication:

Port Type:	RS-232	**Parity:**	None
Baud Rate:	9600	**Stop Bits:**	1
Data Bits:	8	**Flow Control:**	None

Pin Assignments Diagram:

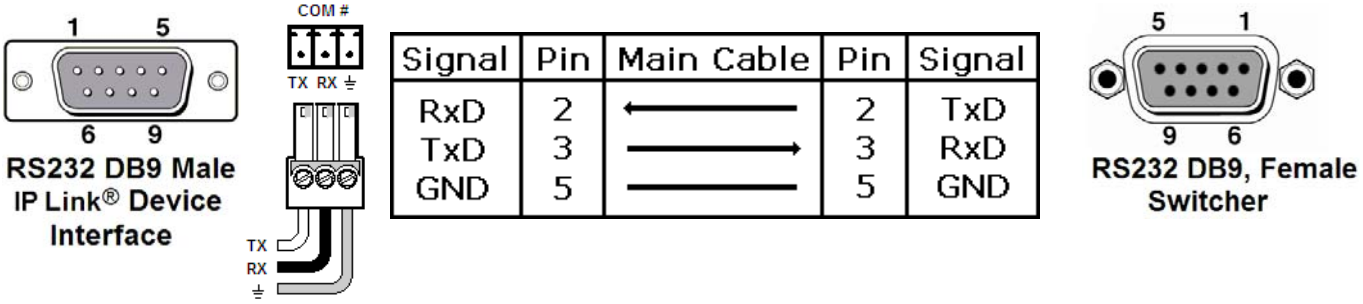

Note: Captive screw connector may also be used as a serial connection.

General Notes: